

1 Specification Sheet

product specifications

7.6 Meter Dual-Reflector Earth Station Antenna

C-, X-, Ku-, or K-Band Capabilities

Television broadcasters and telecommunications system operators, integrators, and designers can bring their systems on line faster, more economically, and with superior performance with the Andrew 7.6 m earth station antenna.

In use worldwide in broadcast applications, including high-density data and voice communications networks, the Andrew 7.6 m earth station antenna features a computer-optimized dual reflector Gregorian system and close-tolerance manufacturing techniques. This combination provides extremely accurate surface contour, exceptionally high gain, superior efficiency, and closely controlled pattern characteristics.

Andrew earth station antennas provide maximum durability with minimal maintenance. The hot-dipped galvanized steel ground mount assembly ensures extended product life. Galvanized and stainless steel hardware maximize corrosion resistance. For cost effective system expansion, available modular equipment options include anti-icing equipment and pressurization systems. Microprocessor steptrack control and motorizable mount options are also available.

Features

- High gain, excellent pattern characteristics
- Advanced Gregorian optics
- Rugged aluminum and steel—125 mph (200 kph) Wind Survival
- No field alignment (C-band)
- 3-year warranty on all structural components.

Compliances

- Meets Intelsat® D, E-1, E-2, E-3, F-1, F-2, F-3, G
- Meets EUTELSAT standards
- ITU-R, S.580-4 and S.465-5
- US FCC regulation 25.209
- Approved for use in the territory of Russia by the Ministry of Communications of the Russian Federation
(Reference: Homologation Certificate No OC/Aφ-136)



ANDREW. Connecting the Wireless World



AE03U-A0556

6/6/03

TU0SEQ.doc

product specifications

Specifications for 7.6 Meter Dual-Reflector Earth Station Antenna

Electrical

Operating frequency band			
C-Band receive, GHz	3.40–4.20		
C-Band transmit, GHz	5.850–6.725		
X-Band receive, GHz	7.25–7.75		
X-Band transmit, GHz	7.90–8.40		
Ku-Band receive, GHz	10.70–13.25		
Ku-Band transmit, GHz	14.00–14.80		
K-Band receive, GHz	14.00–14.80		
K-Band transmit, GHz	17.30–18.40		
Gain, with two port linear or circular combiner (dBi, ± 0.2 dB)			
Rx Freq., GHz	Rx Gain	Tx Freq., GHz	Tx Gain
3.400	43.0	5.850	47.8
3.400	47.2	5.850	52.1
3.625	47.8	6.175	52.6
4.000	48.7	6.425	52.9
4.200	49.1	6.725	53.2
7.250	54.0	7.90	54.6
7.500	54.2	8.15	54.7
7.750	54.4	8.40	54.9
10.700	56.7	13.75	58.9
10.950	57.0	14.00	59.1
11.950	57.8	14.25	59.3
12.750	58.3	14.50	59.4
		14.80	59.6
		17.30	60.2
		18.40	60.7

Polarization

linearly- or circularly-polarized

Polarization discrimination, (linearly-polarized)

>35 dB across 1 dB beamwidth 19–25 log 0 from 1.8° to 9.2°

Voltage axial ratio, (circularly-polarized) across the 1 dB beamwidth

C-Band <1.06:1 on axis, Tx

C-Band <1.06:1 on axis, Rx

X-Band <1.20:1 on axis, Tx and Rx

Beamwidth, mid-band, degrees, receive (transmit)

	C-Band	Ku-Band	X-Band
3 dB	0.58 (0.39)	0.22 (0.18)	0.33 (0.30)
15 dB	1.18 (0.75)	0.39 (0.31)	0.62 (0.57)

Antenna noise temperature,

Under clear sky conditions, at 68°F (20°C), with 2 port combiner

Elevation	C-Band, K	X-Band, K	K-Band, K	Ku-Band, K
10°	45	45	55	55
30°	36	36	41	41
50°	32	32	36	36

Antenna VSWR, transmit and receive <1.3:1

Mechanical

Antenna type	Dual-reflector, Gregorian
Reflector material	Precision-formed aluminum
Reflector segments	16
Mount type	El over AZ, tripod
Antenna pointing range	Coarse/continuous
Elevation	5–90° (85°)
Azimuth	180 (120°)
Polarization	180 (180°)
Hub enclosure dimensions	
Diameter, in (mm)	52 (1.33)
Depth, in (mm)	48.5 (1.17)

Environmental

Operating temperature, F (C)	-40° to 125° (-40° to 52°)
Wind loading	
Survival, mph (km/h)	125 (200) in any position of operation
Optional motor drives, mph (km/h)	45 (72) gusting to 65 (105)
Rain, in (mm)	4 (102) per hour
Solar radiation, BTU/hr/ft ² (watts/m ²)	360 (1135)
Relative humidity, %	100
Shock and vibration,	
As encountered by commercial air, rail and truck shipment	
Atmospheric conditions,	
As encountered in a moderately corrosive coastal/industrial area	
Severe conditions require additional protection	

G/T Performance

C-Band			
LNA/LNB noise temperature, K	65	45	30
ES76 G/T at 10° EL, dB/K	28.2	29.0	29.7
Based on a 2-port, linearly-polarized antenna configuration at 4 GHz and at 10° elevation under clear sky conditions.			
Ku- and K-Band			
LNA/LNB noise temperature, K	165	125	90
ES76 G/T at 10° EL, dB/K	34.4	35.3	36.1
Based on a 2-port, linearly-polarized antenna configuration at 12 GHz and at 10° elevation under clear sky conditions.			
X-Band			
LNA/LNB noise temperature, K	50	75	100
ES76 G/T at 10° EL, dB/K	34.1	33.1	32.3
Based on a 2-port, linearly-polarized antenna configuration at 7.50 GHz and at 10° elevation under clear sky conditions.			

Typical Slab Foundation

Soil bearing capacity, PSF (kgf/m ²)	2000 (9.77)
Reinforcing steel, tons (kg)	1.47 (1339)
Concrete compressive strength, lb/in ² (kg/cm ²)	3000 (211)
Foundation size	
Length, ft (m)	19.5 (5.94)
Width, ft (m)	19.5 (5.94)
Depth, ft (m)	2.5 (0.76)
Concrete volume, yd ³ (m ³)	35.2 (27)

Typical Shipping Information

Net weight, lb (kg)	6500 (2950)
Gross shipping weight (typical), lb (kg)	8200 (3720)
Shipping volume (typical), ft ³ (m ³)	780 (22.1)
Shipping container*	
Quantity 1	Standard 20 ft land/sea container
Quantity 3	Standard 40 ft land/sea container

*Antenna, mount and feed system



Connecting the Wireless World

Andrew Corporation
10500 W. 153rd Street
Orland Park, IL 60462 USA

Customer Support Center
From North America:
Telephone: 1-800-255-1479
Fax: 1-800-349-5444
International:
Telephone: +1-708-873-2307
Fax: +1-708-349-5444

Internet
www.andrew.com
Fax-On-Demand
From North America:
1-800-861-1700
International:
+1-708-873-3614

All designs, specifications and availabilities of products and services presented in this bulletin are subject to change without notice.


Bulletin 10293 (Rev. B 2/03) Copyright © 2003 Andrew Corporation, Orland Park, IL 60462 USA


Printed in USA

AE03U-A0556
6/6/03
TU0SEQ.doc


2 Patterns


2.1 Azimuth Patterns

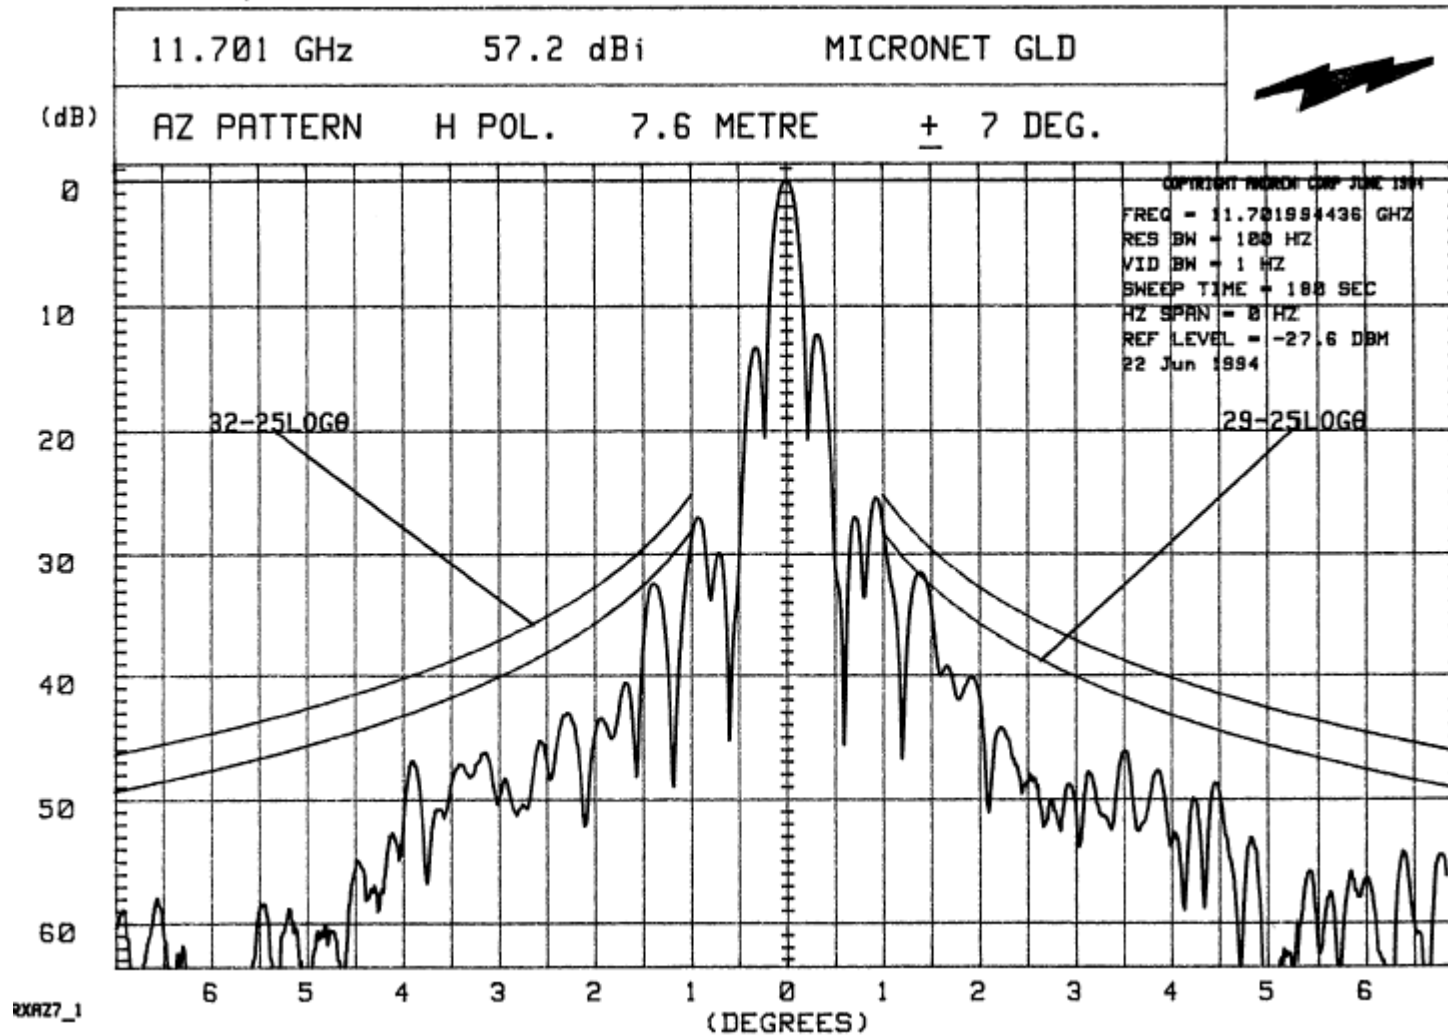

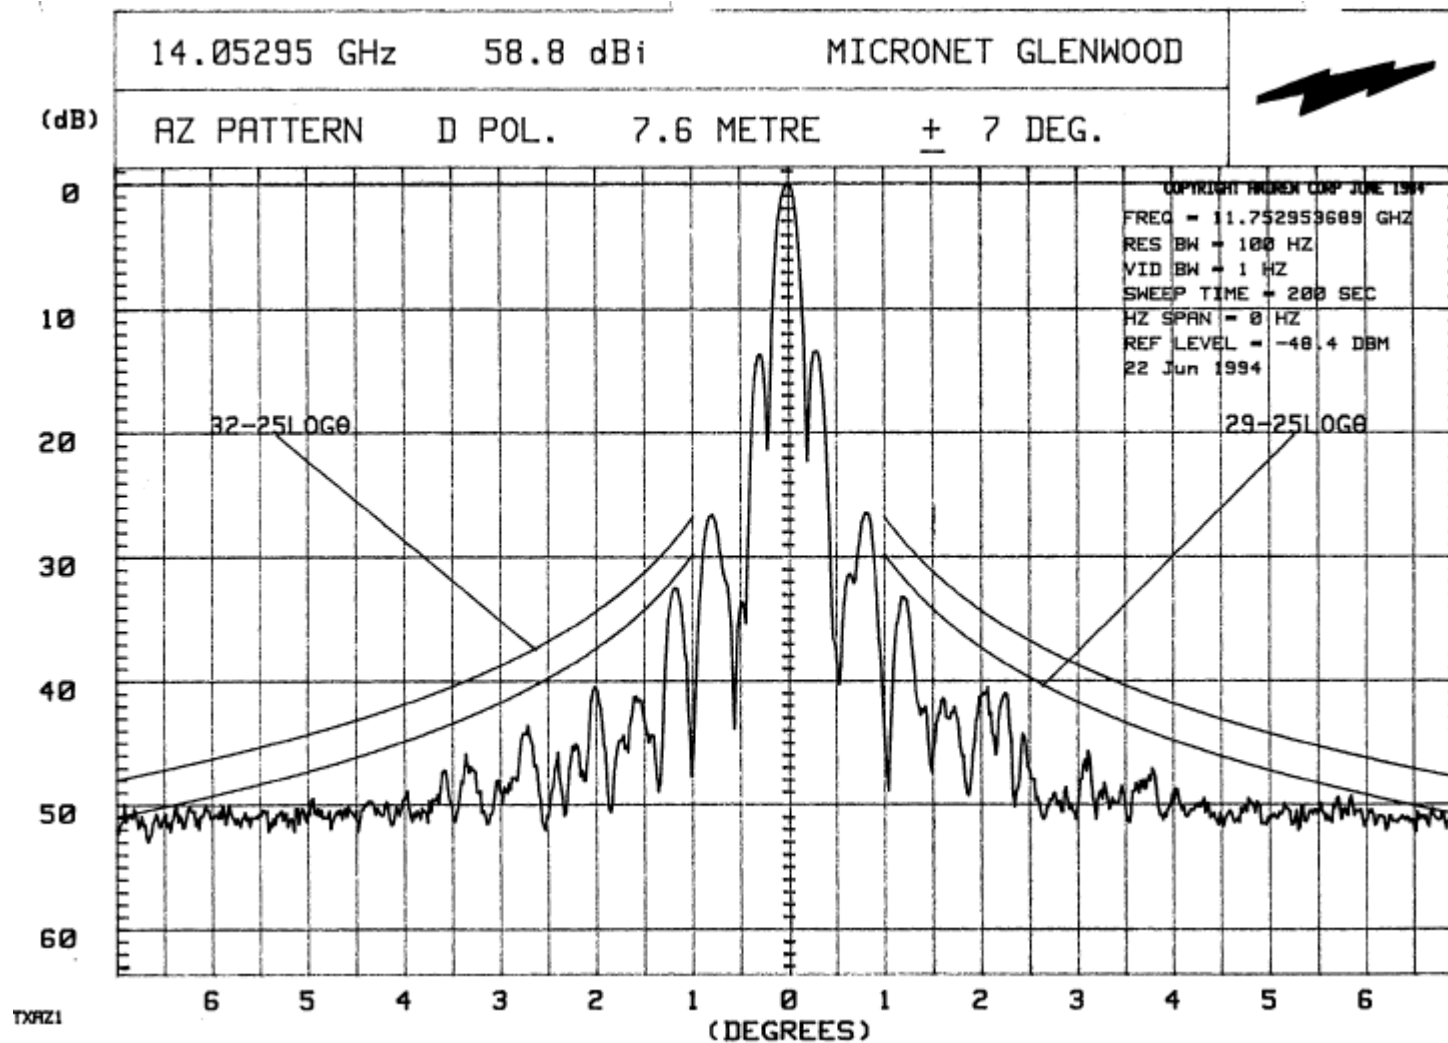

2.2 Elevation Patterns

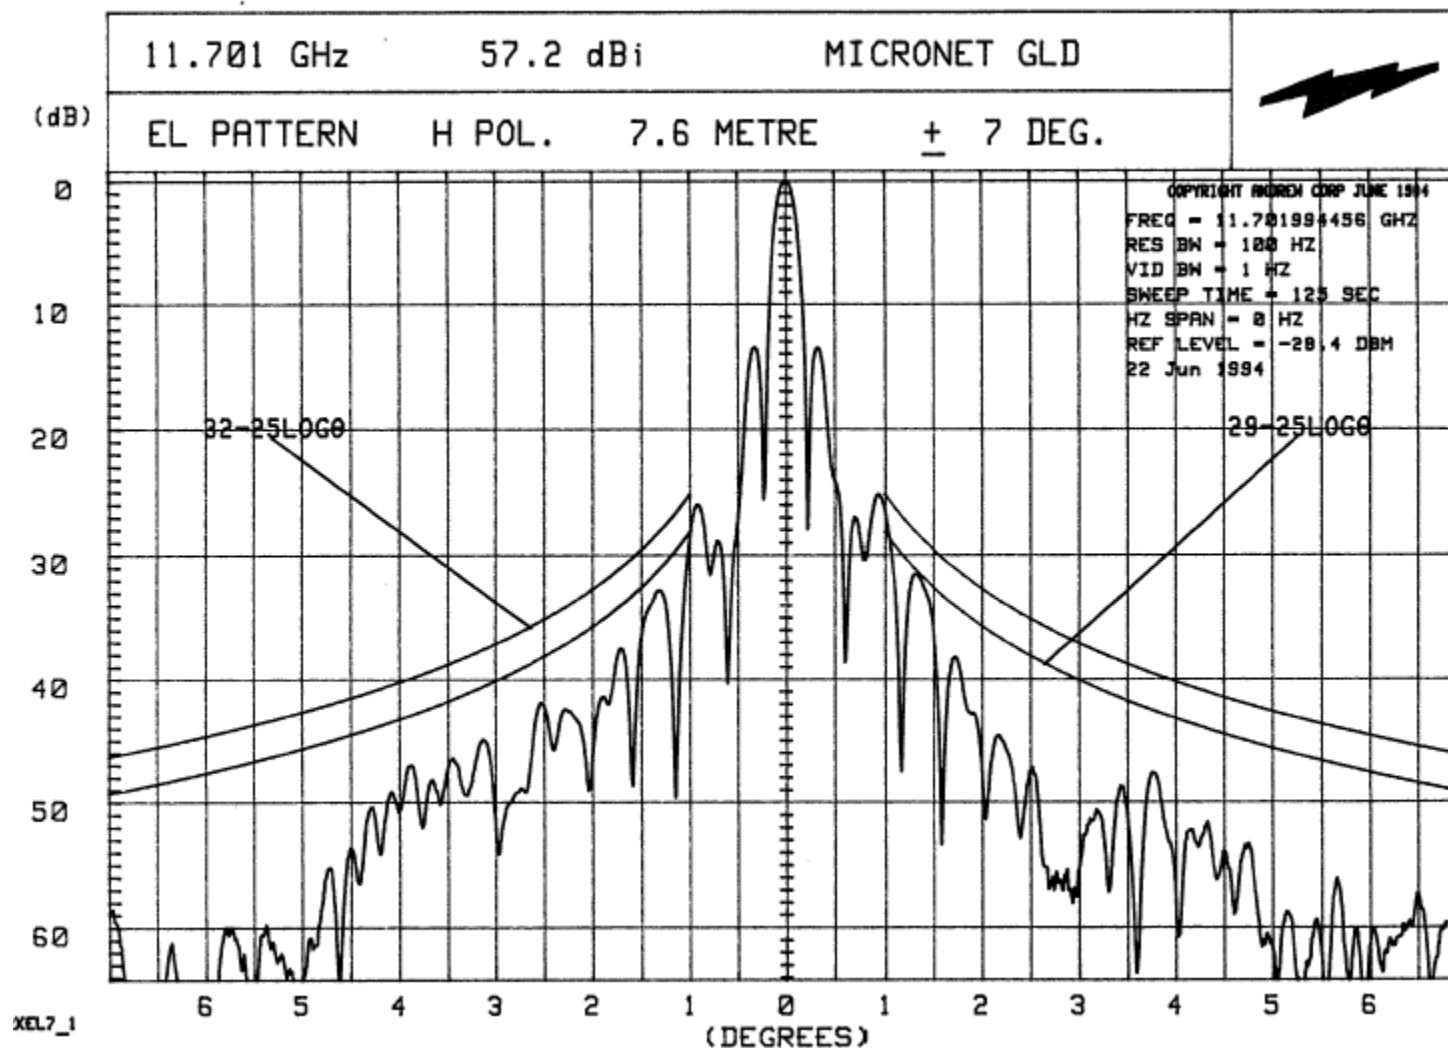

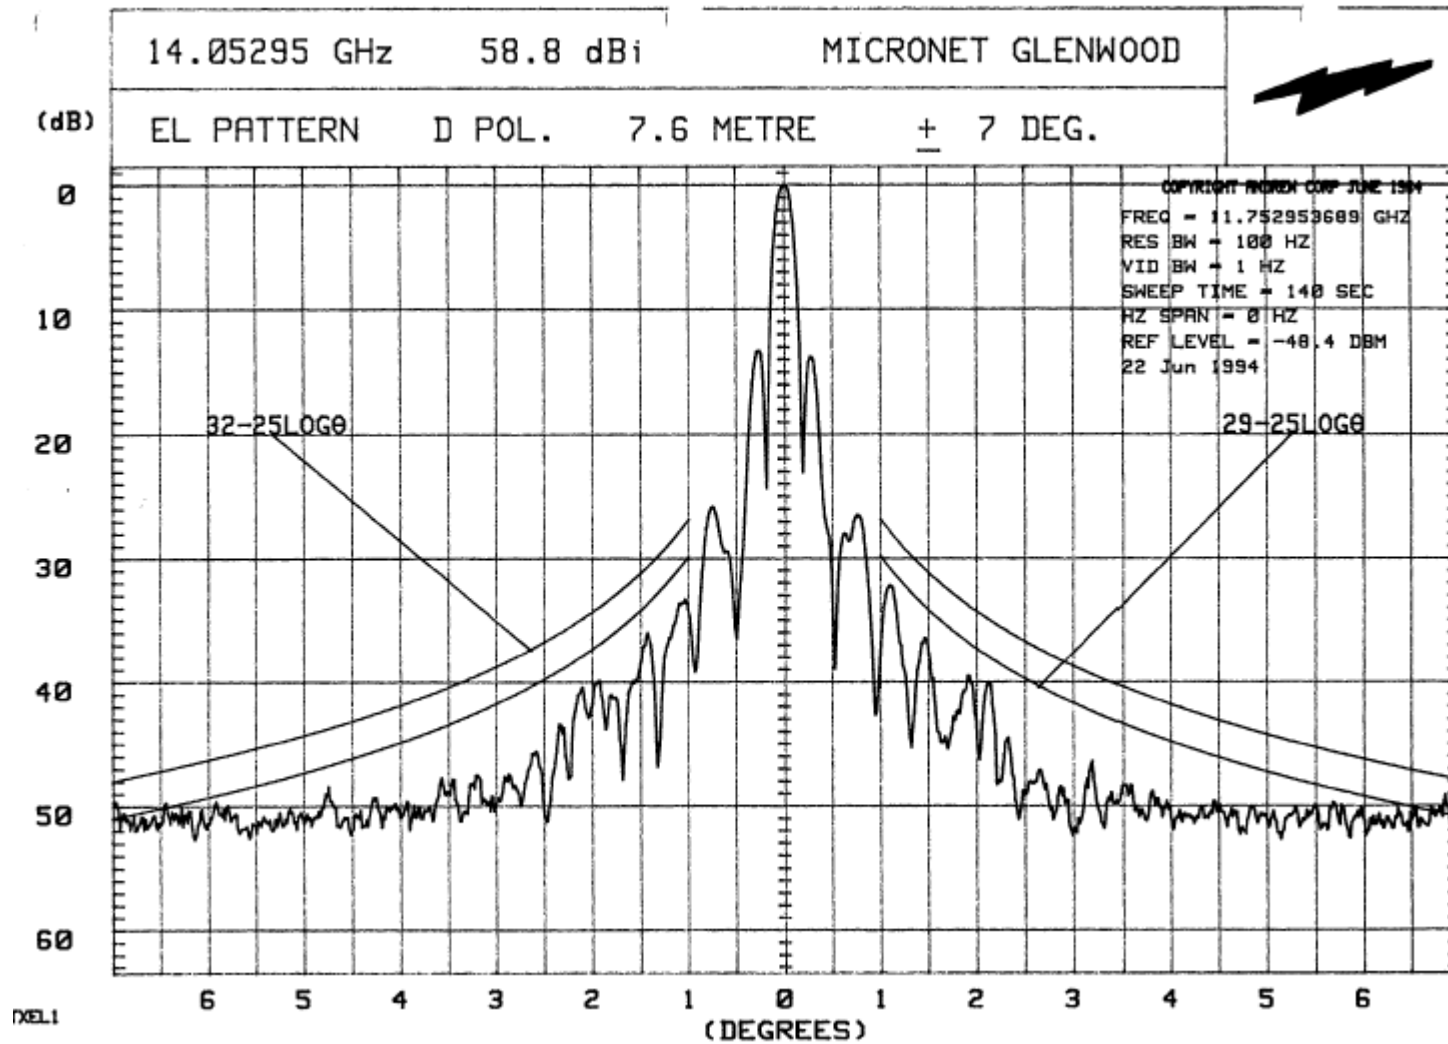

3 Pattern Envelopes

Pattern Envelope

Linear Co-Polarized

Antenna Type Number: ES76, ES76HS, ES76XHS

Frequency Band: 10.7–12.75 GHz

Gain: 58.0 dBi at 11.95 GHz

Diameter: 7.6 Meter

3 dB Beamwidth .22 Degrees

15 dB Beamwidth .39 Degrees


ANDREW CORPORATION



PE 5863

Dave Neuman

Approved 23 Sept. 1992

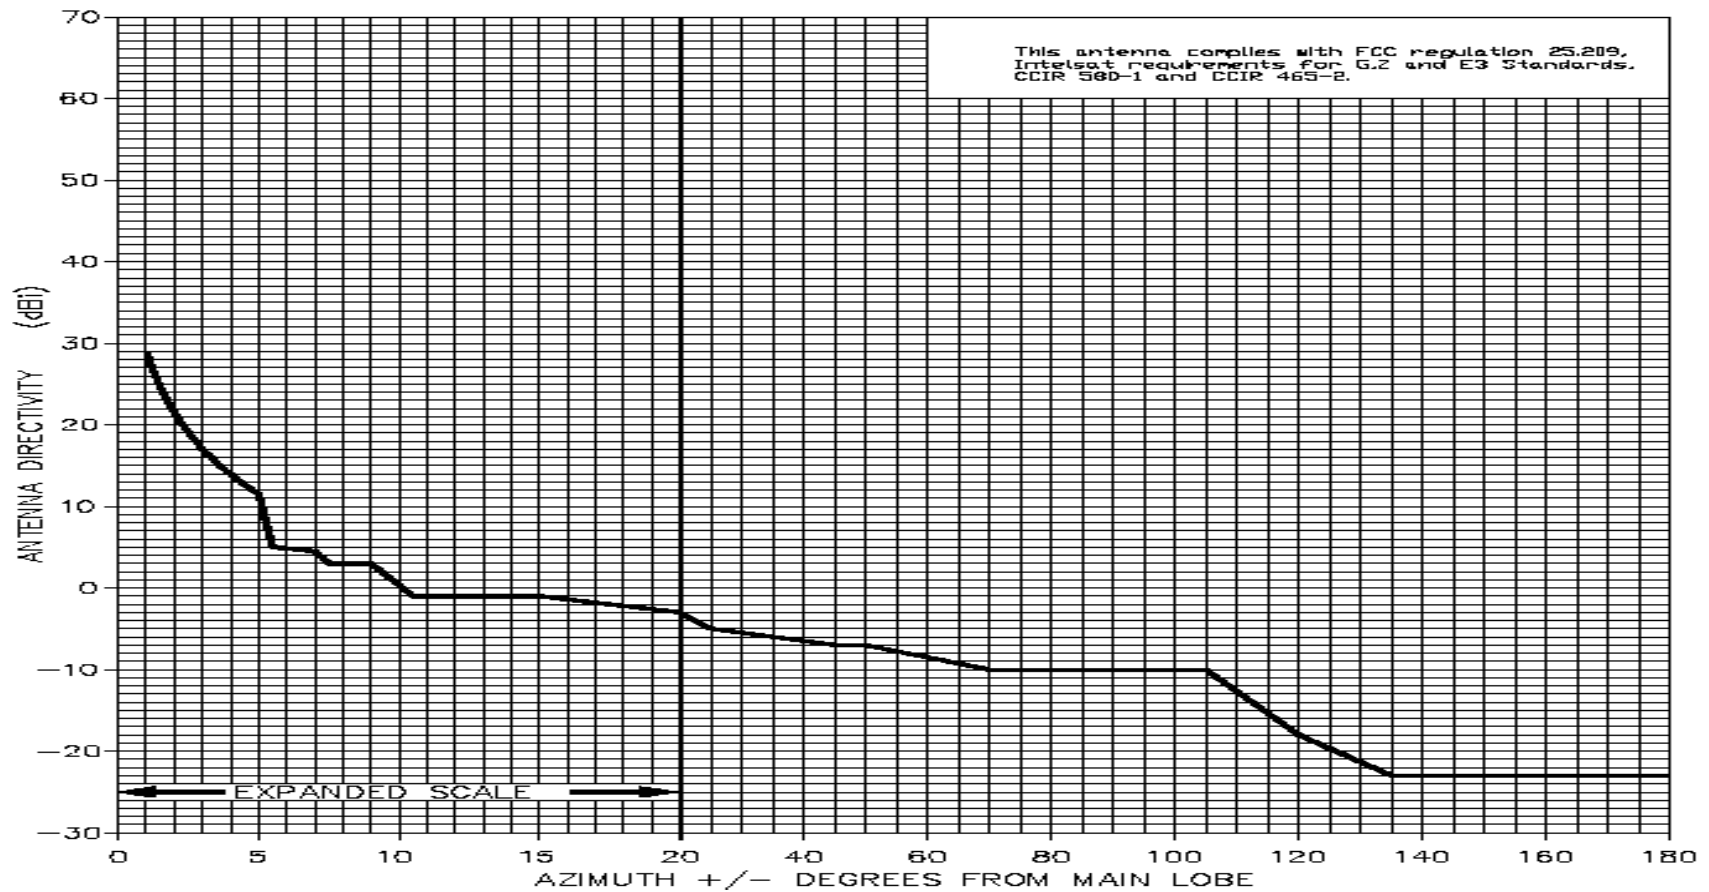

AE03U-A0556

6/6/03

TU0SEQ.doc

Pattern Envelope

Linear Co-Polarized

Antenna Type Number: ES76, ES76HS, ES76XHS

Frequency Band: 12.75–14.8 GHz

Gain: 59.4 dBi at 14.25 GHz

Diameter: 7.6 Meter

3 dB Beamwidth .18 Degrees

15 dB Beamwidth .31 Degrees


ANDREW CORPORATION



PE 5864

Dave Neubauer

Approved 23 Sept. 1992

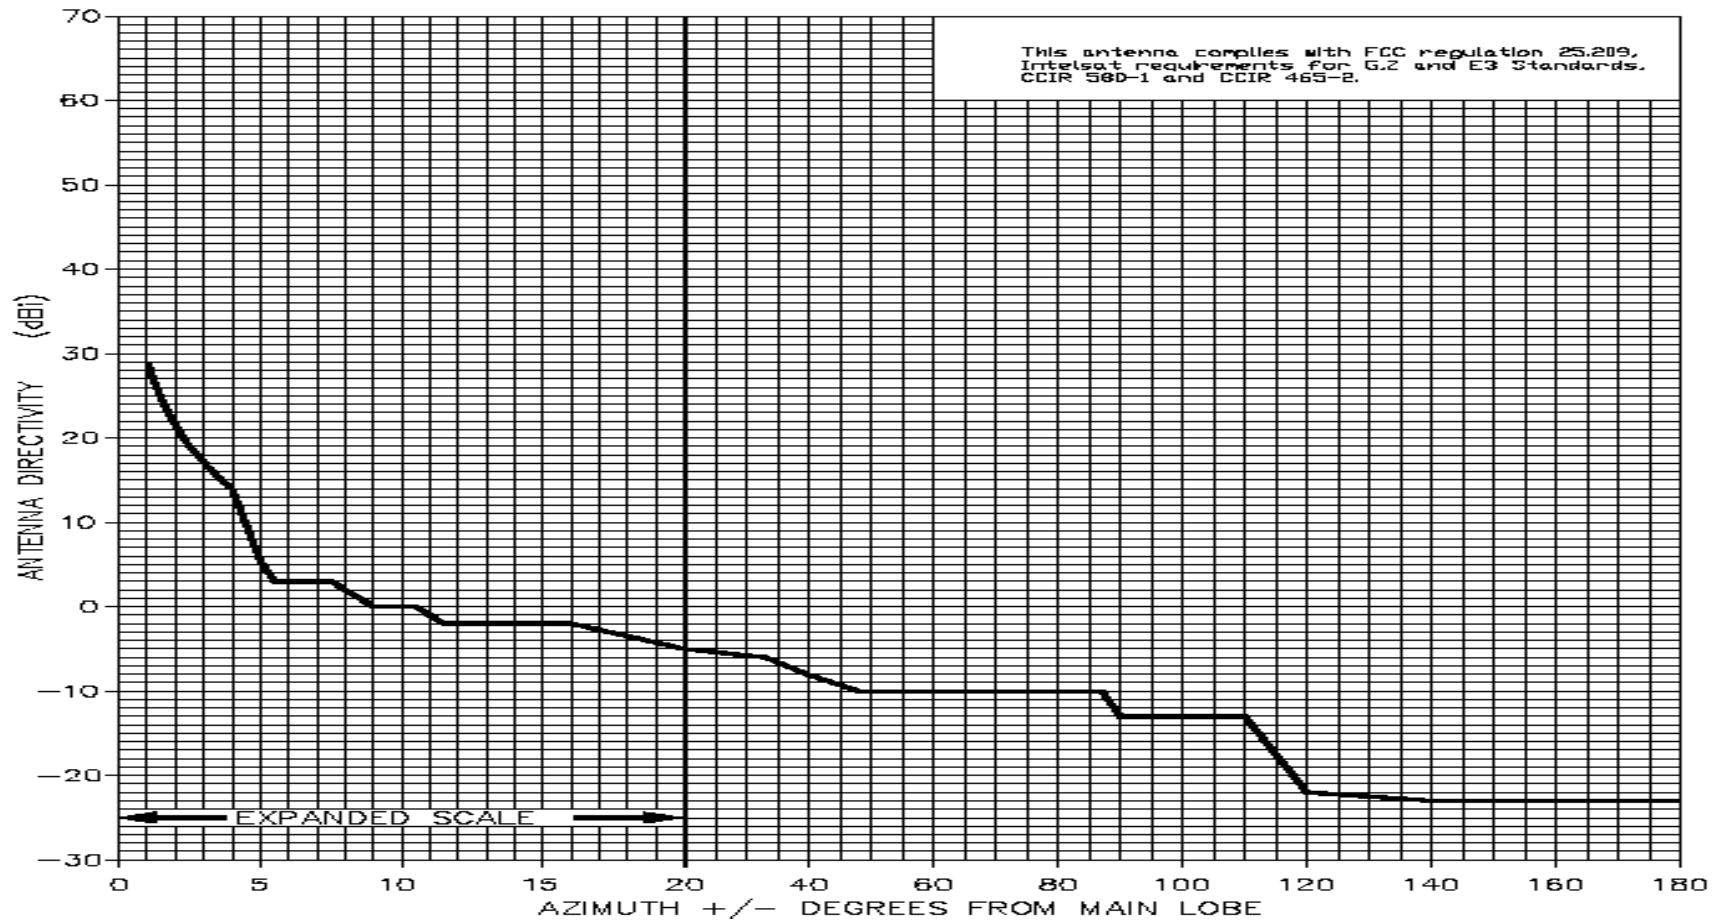

AE03U-A0556

6/6/03

TU0SEQ.doc